


Zahnriemenscheiben MXL 025

Teilung 0,08" (2,032 mm) - Riemenbreite 1/4" (6,35 mm)


Antriebstechnik
Ketten für Antrieb und Förderung

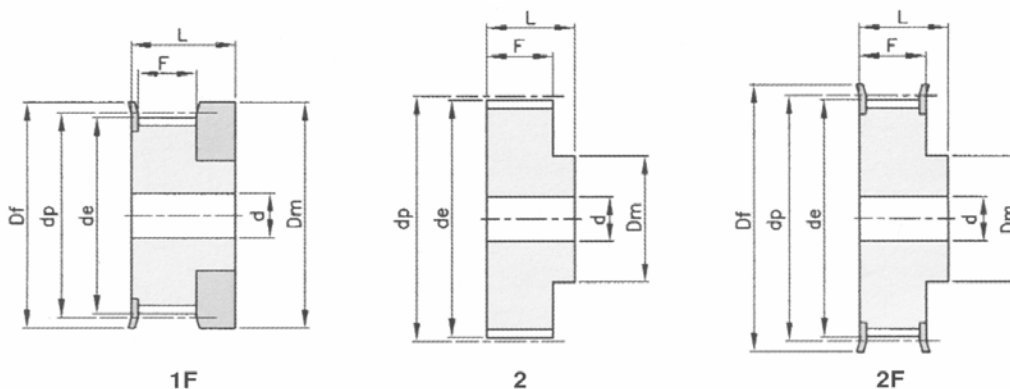

Code	Type	Material	Zähnezahl	dp	de	Df	Dm	F	L	d	kg
16 MXL 025	1F	Al	16	10,35	9,84	15	15	8,5	16		0,01
18 MXL 025	1F	Al	18	11,64	11,13	16	16	8,5	16		0,01
20 MXL 025	1F	Al	20	12,94	12,43	16	16	8,5	16		0,01
22 MXL 025	2F	Al	22	14,23	13,72	18	10	11	16	3	0,01
24 MXL 025	2F	Al	24	15,52	15,02	18	10	11	16	3	0,01
28 MXL 025	2F	Al	28	18,11	17,60	23	11	11	16	3	0,01
30 MXL 025	2F	Al	30	19,40	18,90	23	12	11	16	4	0,02
32 MXL 025	2F	Al	32	20,70	20,19	25	14	11	16	4	0,02
36 MXL 025	2F	Al	36	23,29	22,78	28	16	11	16	4	0,02
40 MXL 025	2F	Al	40	25,87	25,36	32	18	11	16	4	0,02
42 MXL 025	2F	Al	42	27,17	26,66	32	18	11	16	5	0,03
44 MXL 025	2F	Al	44	28,46	27,95	36	18	11	16	5	0,03
48 MXL 025	2	Al	48	31,05	30,54		20	11	16	5	0,03
60 MXL 025	2	Al	60	38,81	38,30		24	11	16	5	0,04
72 MXL 025	2	Al	72	46,57	46,06		25	11	16	6	0,05

Zahnriemenscheiben XL 037


Teilung 1/5" (5,08 mm) - Riemenbreite 3/8" (9,52 mm)

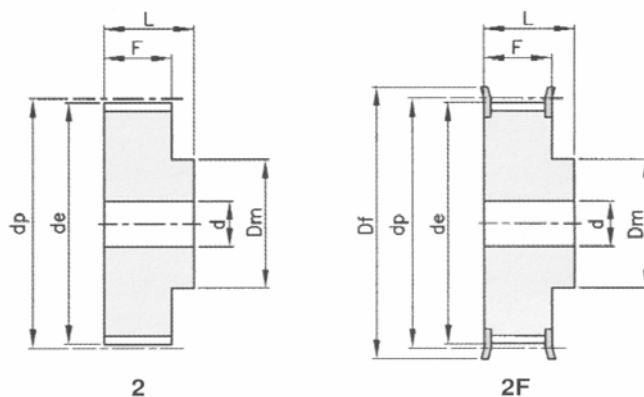

Code	Type	Material	Zähnezahl	dp	de	Df	Dm	F	L	d	kg
10 XL 037	2F	Al	10	16,17	15,66	23	10	14,3	20		0,01
11 XL 037	2F	Al	11	17,79	17,28	23	10	14,3	20		0,01
12 XL 037	2F	Al	12	19,40	18,90	25	10	14,3	20		0,01
13 XL 037	2F	Al	13	21,02	20,51	25	10	14,3	20		0,01
14 XL 037	2F	Al	14	22,64	23,13	28	16	14,3	20		0,02
15 XL 037	2F	Al	15	24,25	23,75	28	16	14,3	20		0,02
16 XL 037	2F	Al	16	25,87	25,36	32	16	14,3	20		0,03
17 XL 037	2F	Al	17	27,49	26,98	32	20	14,3	20		0,03
18 XL 037	2F	Al	18	29,11	28,60	36	20	14,3	20		0,04
19 XL 037	2F	Al	19	30,72	30,21	36	20	14,3	22		0,04
20 XL 037	2F	Al	20	32,34	31,83	38	25	14,3	22		0,05
21 XL 037	2F	Al	21	33,96	33,45	38	25	14,3	22		0,05
22 XL 037	2F	Al	22	35,57	35,07	42	25	14,3	22		0,06
24 XL 037	2F	Al	24	38,81	38,30	44	30	14,3	22		0,06
26 XL 037	2F	Al	26	42,04	41,53	48	30	14,3	22	8	0,09
27 XL 037	2F	Al	27	43,66	43,15	48	34	14,3	22	8	0,09
28 XL 037	2F	Al	28	45,28	44,77	51	34	14,3	22	8	0,10
30 XL 037	2F	Al	30	48,51	48,00	54	38	14,3	22	8	0,12
32 XL 037	2F	Al	32	51,74	51,24	57	38	14,3	25	8	0,12
34 XL 037	2F	Al	34	54,98	54,47	60	38	14,3	25	8	0,13
35 XL 037	2F	Al	35	56,60	56,09	63	38	14,3	25	8	0,14
36 XL 037	2	Al	36	58,21	57,70		45	14,3	25	8	0,14
38 XL 037	2	Al	38	61,45	60,94		45	14,3	25	8	0,15
40 XL 037	2	Al	40	64,68	64,17		45	14,3	25	8	0,16
42 XL 037	2	Al	42	67,91	67,41		45	14,3	25	8	0,18
44 XL 037	2	Al	44	71,15	70,64		45	14,3	25	8	0,19
48 XL 037	2	Al	48	77,62	77,11		45	14,3	25	10	0,19
52 XL 037	2	Al	52	84,08	83,57		45	14,3	25	10	0,19
60 XL 037	2	Al	60	97,02	96,51		45	14,3	25	10	0,22
72 XL 037	2	Al	72	116,42	115,92		45	14,3	25	10	0,44

Zahnriemenscheiben L 050


Teilung 3/8" (9,525 mm) - Riemenbreite 1/2" (12,7 mm)

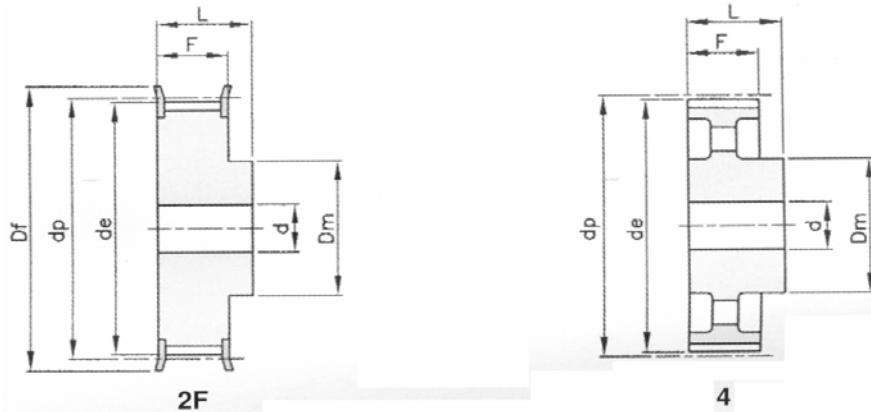

Code	Type	Material	Zähnezahl	dp	de	Df	Dm	F	L	d	kg
10 L 050	2F	ST	10	30,32	29,56	36	20	19,0	28	8	0,11
11 L 050	2F	ST	11	33,35	32,59	38	24	19,0	30	8	0,14
12 L 050	2F	ST	12	36,38	35,62	42	24	19,0	30	8	0,17
13 L 050	2F	ST	13	39,41	38,65	44	28	19,0	30	8	0,21
14 L 050	2F	ST	14	42,44	41,68	48	28	19,0	30	8	0,24
15 L 050	2F	ST	15	45,48	44,72	51	34	19,0	30	8	0,29
16 L 050	2F	ST	16	48,51	47,75	54	36	19,0	32	8	0,33
17 L 050	2F	ST	17	51,54	50,78	57	36	19,0	32	10	0,38
18 L 050	2F	ST	18	54,57	53,81	60	40	19,0	32	10	0,44
19 L 050	2F	ST	19	57,61	56,84	63	40	19,0	32	10	0,47
20 L 050	2F	ST	20	60,64	59,88	66	40	19,0	32	10	0,51
21 L 050	2F	ST	21	63,67	62,91	71	45	19,0	32	10	0,60
22 L 050	2F	ST	22	66,70	65,94	75	45	19,0	32	10	0,64
23 L 050	2F	ST	23	69,73	68,97	79	55	19,0	32	10	0,78
24 L 050	2F	ST	24	72,77	72,00	79	55	19,0	32	10	0,81
25 L 050	2F	ST	25	75,80	75,04	83	58	19,0	32	10	0,89
26 L 050	2F	ST	26	78,83	78,07	87	58	19,0	32	12	0,94
27 L 050	2F	ST	27	81,86	81,10	87	58	19,0	32	12	0,99
28 L 050	2F	ST	28	84,89	84,13	91	58	19,0	32	12	1,04
30 L 050	2F	ST	30	90,96	90,20	97	70	19,0	32	12	1,17
32 L 050	2F	ST	32	97,03	96,26	103	70	19,0	32	12	1,41
33 L 050	2F	ST	33	100,05	99,29	106	70	19,0	32	12	1,49
34 L 050	2F	ST	34	103,08	102,32	111	70	19,0	32	12	1,57
35 L 050	2F	ST	35	106,12	105,35	111	70	19,0	32	12	1,62
36 L 050	2F	ST	36	109,15	108,39	115	70	19,0	32	12	1,70
40 L 050	2F	ST	40	121,29	120,51	127	70	19,0	32	12	2,03
42 L 050	2F	ST	42	127,34	126,58	135	70	19,0	32	12	2,21
44 L 050	2F	ST	44	133,40	132,64	140	70	19,0	32	12	2,38
45 L 050	2F	ST	45	136,44	135,67	143	70	19,0	32	12	2,48
48 L 050	2F	ST	48	145,53	144,77	152	70	19,0	32	12	2,78
50 L 050	4	GG	50	151,60	150,83		70	19,0	32	14	1,74
52 L 050	4	GG	52	157,66	156,90		70	19,0	32	14	1,80
56 L 050	4	GG	56	169,79	169,02		70	19,0	32	14	1,87
57 L 050	4	GG	57	172,82	172,06		70	19,0	32	14	1,88
60 L 050	4	GG	60	181,91	181,15		75	19,0	42	14	2,41
72 L 050	4	GG	72	218,29	217,53		75	19,0	42	14	2,82
84 L 050	4	GG	84	254,68	253,92		75	19,0	42	14	3,08
96 L 050	4	GG	96	291,06	290,30		75	19,0	42	14	3,42

Zahnriemenscheiben L 075


Teilung 3/8" (9,525 mm) - Riemenbreite 3/4" (19,05 mm)

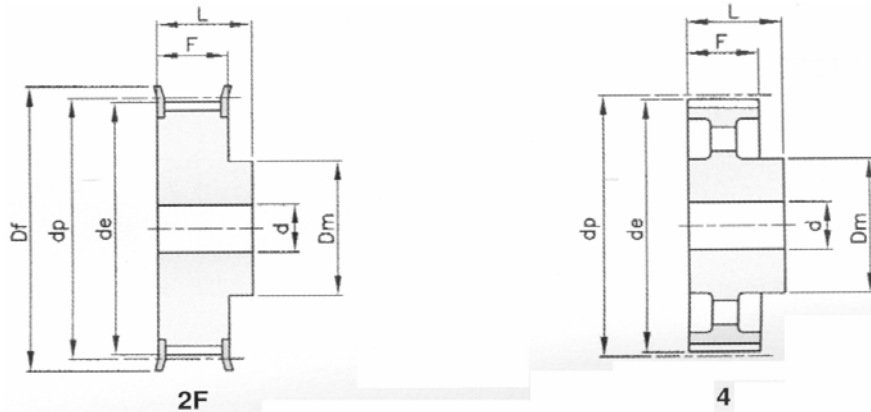

Code	Type	Material	Zähnezahl	dp	de	Df	Dm	F	L	d	kg
10 L 075	2F	ST	10	30,32	29,56	36	20	25,4	38	8	0,14
11 L 075	2F	ST	11	33,35	32,59	38	24	25,4	38	8	0,18
12 L 075	2F	ST	12	36,38	35,62	42	24	25,4	38	8	0,22
12 L 075	2F	ST	13	39,41	38,65	44	28	25,4	38	8	0,26
14 L 075	2F	ST	14	42,44	41,68	48	28	25,4	38	8	0,30
15 L 075	2F	ST	15	45,48	44,72	51	34	25,4	38	8	0,37
16 L 075	2F	ST	16	48,51	47,75	54	36	25,4	38	10	0,43
17 L 075	2F	ST	17	51,54	50,78	57	36	25,4	38	10	0,46
18 L 075	2F	ST	18	54,57	53,81	60	40	25,4	38	10	0,54
19 L 075	2F	ST	19	57,61	56,84	63	40	25,4	38	10	0,58
20 L 075	2F	ST	20	60,64	59,88	66	40	25,4	38	10	0,64
21 L 075	2F	ST	21	63,67	62,91	71	45	25,4	38	10	0,71
22 L 075	2F	ST	22	66,70	65,94	75	45	25,4	38	10	0,79
23 L 075	2F	ST	23	69,73	68,97	79	55	25,4	38	10	0,94
24 L 075	2F	ST	24	72,77	72,00	79	55	25,4	38	10	1,00
25 L 075	2F	ST	25	75,80	75,04	83	58	25,4	38	10	1,10
26 L 075	2F	ST	26	78,83	78,07	87	58	25,4	38	12	1,16
27 L 075	2F	ST	27	81,86	81,10	87	58	25,4	38	12	1,22
28 L 075	2F	ST	28	84,89	84,13	91	58	25,4	38	12	1,30
30 L 075	2F	ST	30	90,96	90,20	97	70	25,4	38	12	1,47
32 L 075	2F	ST	32	97,03	96,26	103	70	25,4	38	12	1,75
33 L 075	2F	ST	33	100,05	99,29	106	70	25,4	38	12	1,85
34 L 075	2F	ST	34	103,08	102,32	111	70	25,4	38	12	1,93
35 L 075	2F	ST	35	106,12	105,35	111	70	25,4	38	12	2,03
36 L 075	2F	ST	36	109,15	108,39	115	70	25,4	38	12	2,14
40 L 075	2F	ST	40	121,29	120,51	127	70	25,4	38	12	2,56
42 L 075	2F	ST	42	127,34	126,58	135	70	25,4	38	12	2,81
44 L 075	2F	ST	44	133,40	132,64	140	70	25,4	38	12	3,02
45 L 075	2F	ST	45	136,44	135,67	143	70	25,4	38	12	3,16
48 L 075	2F	ST	48	145,53	144,77	152	70	25,4	38	12	3,57
50 L 075	4	GG	50	151,60	150,83		70	25,4	38	14	2,10
52 L 075	4	GG	52	157,66	156,90		70	25,4	38	14	2,13
56 L 075	4	GG	56	169,79	169,02		70	25,4	38	14	2,27
57 L 075	4	GG	57	172,82	172,06		70	25,4	38	14	2,28
60 L 075	4	GG	60	181,91	181,15		75	25,4	45	14	2,70
75 L 075	4	GG	72	218,29	217,53		75	25,4	45	14	3,19
84 L 075	4	GG	84	254,68	253,92		75	25,4	45	14	3,64
96 L 075	4	GG	96	291,06	290,30		75	25,4	45	14	4,04

Zahnriemenscheiben L 100


Teilung 3/8" (9,525 mm) - Riemenbreite 1" (25,4 mm)

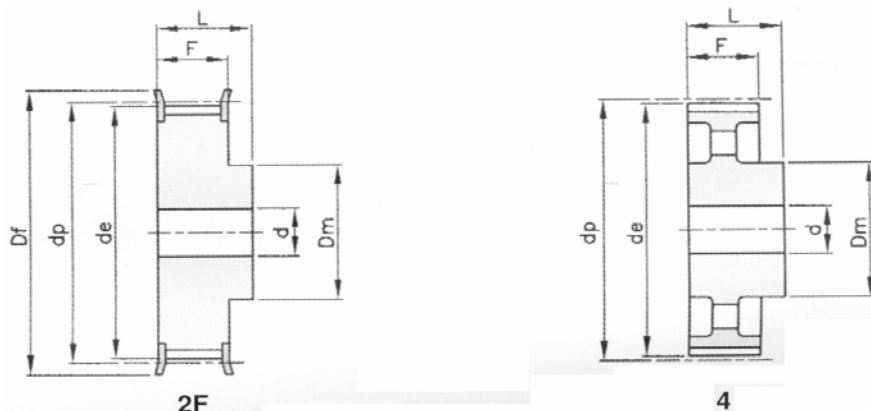

Code	Type	Material	Zähnezahl	dp	de	Df	Dm	F	L	d	kg
10 L 100	2F	ST	10	30,32	29,56	36	20	31,8	45	8	0,17
11 L 100	2F	ST	11	33,35	32,59	38	24	31,8	45	8	0,22
12 L 100	2F	ST	12	36,38	35,62	42	24	31,8	45	8	0,26
13 L 100	2F	ST	13	39,41	38,65	44	28	31,8	45	10	0,32
14 L 100	2F	ST	14	42,44	41,68	48	28	31,8	45	10	0,35
15 L 100	2F	ST	15	45,48	44,72	51	34	31,8	45	10	0,43
16 L 100	2F	ST	16	48,51	47,75	54	36	31,8	45	10	0,50
17 L 100	2F	ST	17	51,54	50,78	57	36	31,8	45	10	0,56
18 L 100	2F	ST	18	54,57	53,81	60	40	31,8	45	10	0,64
19 L 100	2F	ST	19	57,61	56,84	63	40	31,8	45	10	0,70
20 L 100	2F	ST	20	60,64	59,88	66	40	31,8	45	10	0,77
21 L 100	2F	ST	21	63,67	62,91	71	45	31,8	45	12	0,88
22 L 100	2F	ST	22	66,70	65,94	75	45	31,8	45	12	0,95
23 L 100	2F	ST	23	69,73	68,97	79	55	31,8	45	12	1,11
24 L 100	2F	ST	24	72,77	72,00	79	55	31,8	45	12	1,18
25 L 100	2F	ST	25	75,80	75,04	83	58	31,8	45	12	1,30
26 L 100	2F	ST	26	78,83	78,07	87	58	31,8	45	12	1,40
27 L 100	2F	ST	27	81,86	81,10	87	58	31,8	45	12	1,47
28 L 100	2F	ST	28	84,89	84,13	91	58	31,8	45	12	1,58
30 L 100	2F	ST	30	90,96	90,20	97	70	31,8	45	12	1,78
32 L 100	2F	ST	32	97,03	96,26	103	70	31,8	45	12	2,11
33 L 100	2F	ST	33	100,05	99,29	106	70	31,8	45	12	2,23
34 L 100	2F	ST	34	103,08	102,32	111	70	31,8	45	12	2,39
35 L 100	2F	ST	35	106,12	105,35	111	70	31,8	45	12	2,45
36 L 100	2F	ST	36	109,15	108,39	115	70	31,8	45	12	2,59
40 L 100	2F	ST	40	121,29	120,51	127	70	31,8	45	12	3,13
42 L 100	2F	ST	42	127,34	126,58	135	70	31,8	45	12	3,43
44 L 100	2F	ST	44	133,40	132,64	140	70	31,8	45	12	3,72
45 L 100	2F	ST	45	136,44	135,67	143	70	31,8	45	12	3,89
48 L 100	2F	ST	48	145,53	144,77	152	70	31,8	45	12	4,38
50 L 100	4	GG	50	151,60	150,83		70	31,8	45	14	2,41
52 L 100	4	GG	52	157,66	156,90		70	31,8	45	14	2,55
56 L 100	4	GG	56	169,79	169,02		70	31,8	45	14	2,65
57 L 100	4	GG	57	172,82	172,06		70	31,8	45	14	2,71
60 L 100	4	GG	60	181,91	181,15		75	31,8	45	14	3,11
72 L 100	4	GG	72	218,29	217,53		75	31,8	45	14	3,65
84 L 100	4	GG	84	254,68	253,92		75	31,8	45	14	4,12
96 L 100	4	GG	96	291,06	290,30		75	31,8	45	14	4,60

Zahnriemenscheiben H 075


Teilung 1/2" (12,7 mm) - Riemenbreite 3/4" (19,05 mm)

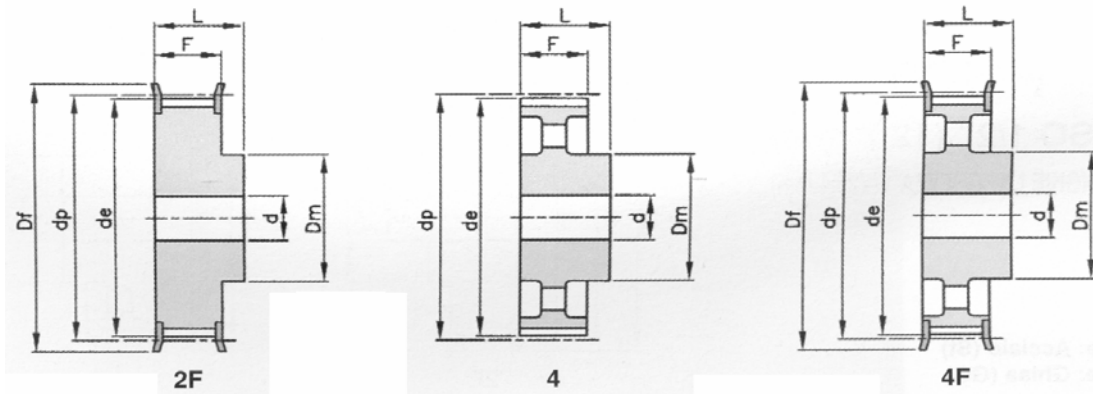

Code	Type	Material	Zähnezahl	dp	de	Df	Dm	F	L	d	kg
14 H 075	2F	ST	14	56,59	55,22	63	40	26,4	40	10	0,58
15 H 075	2F	ST	15	60,64	59,27	66	45	26,4	40	10	0,69
16 H 075	2F	ST	16	64,68	63,31	71	45	26,4	40	10	0,77
17 H 075	2F	ST	17	68,72	67,35	75	45	26,4	40	12	0,84
18 H 075	2F	ST	18	72,77	71,39	79	55	26,4	40	12	1,01
19 H 075	2F	ST	19	76,81	75,44	83	60	26,4	40	12	1,15
20 H 075	2F	ST	20	80,85	79,48	87	62	26,4	40	12	1,27
21 H 075	2F	ST	21	84,89	83,52	91	65	26,4	40	12	1,41
22 H 075	2F	ST	22	88,94	87,56	93	68	26,4	40	12	1,55
23 H 075	2F	ST	23	92,98	91,61	97	72	26,4	40	12	1,71
24 H 075	2F	ST	24	97,03	95,65	103	72	26,4	40	12	1,83
25 H 075	2F	ST	25	101,06	99,69	106	72	26,4	40	12	1,96
26 H 075	2F	ST	26	105,11	103,73	111	80	26,4	40	12	2,19
27 H 075	2F	ST	27	109,15	107,78	115	80	26,4	40	12	2,32
28 H 075	2F	ST	28	113,19	111,82	119	80	26,4	40	12	2,47
30 H 075	2F	ST	30	121,29	119,90	127	80	26,4	40	14	2,76
32 H 075	2F	ST	32	129,36	127,99	135	80	26,4	40	14	3,08
33 H 075	2F	ST	33	133,40	132,03	140	80	26,4	40	14	3,25
34 H 075	2F	ST	34	137,45	136,07	143	80	26,4	40	14	3,42
35 H 075	2F	St	35	141,49	140,12	148	80	26,4	40	14	3,61
36 H 075	2F	ST	36	145,53	144,16	152	80	26,4	40	14	3,79
38 H 075	2F	ST	38	153,62	152,24	158	80	26,4	40	14	4,16
40 H 075	2F	ST	40	161,70	160,33	168	80	26,4	40	14	4,58
44 H 075	4F	GG	44	177,87	176,50	184	80	26,4	40	18	2,57
48 H 075	4F	GG	48	194,04	192,67	200	90	26,4	45	18	3,56
50 H 075	4	GG	50	202,13	200,75	90	26,4	45	18	3,74	

Zahnriemenscheiben H 100


Teilung 1/2" (12,7 mm) - Riemenbreite 1" (25,4 mm)

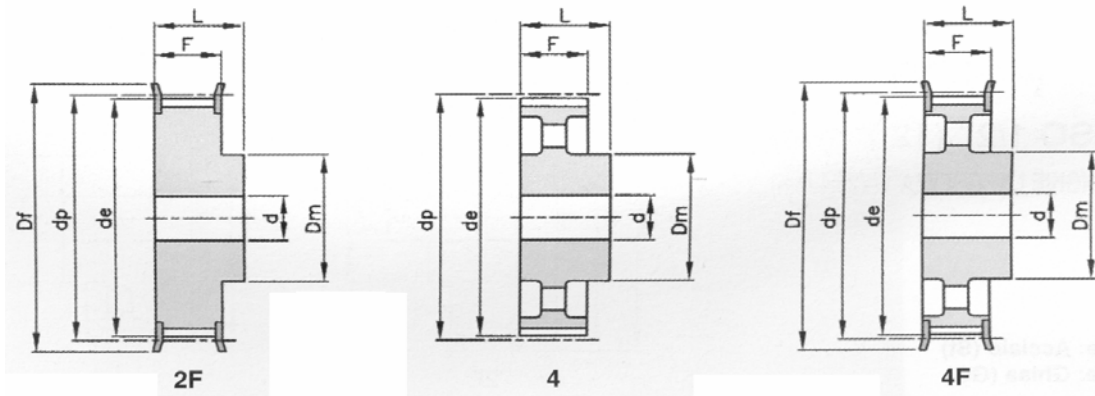

Code	Type	Material	Zähnezahl	dp	de	Df	Dm	F	L	d	kg
14 H 100	2F	ST	14	56,59	55,22	63	40	31,8	45	12	0,65
15 H 100	2F	ST	15	60,64	59,27	66	45	31,8	45	12	0,77
16 H 100	2F	ST	16	64,68	63,31	71	45	31,8	45	12	0,87
17 H 100	2F	ST	17	68,72	67,35	75	45	31,8	45	12	0,97
18 H 100	2F	ST	18	72,77	71,39	79	55	31,8	45	12	1,16
19 H 100	2F	ST	19	76,81	75,44	83	60	31,8	45	14	1,30
20 H 100	2F	ST	20	80,85	79,48	87	62	31,8	45	14	1,44
21 H 100	2F	ST	21	84,89	83,52	91	65	31,8	45	14	1,60
22 H 100	2F	ST	22	88,94	87,56	93	68	31,8	45	14	1,76
23 H 100	2F	ST	23	92,98	91,61	97	72	31,8	45	14	1,94
24 H 100	2F	ST	24	97,03	95,65	103	72	31,8	45	14	2,09
25 H 100	2F	ST	25	101,06	99,69	106	72	31,8	45	14	2,24
26 H 100	2F	ST	26	105,11	103,73	111	80	31,8	45	14	2,49
27 H 100	2F	ST	27	109,15	107,78	115	80	31,8	45	14	2,66
28 H 100	2F	ST	28	113,19	111,82	119	80	31,8	45	14	2,83
29 H 100	2F	ST	29	117,23	115,86	123	80	31,8	45	14	3,01
30 H 100	2F	ST	30	121,29	119,90	127	80	31,8	45	14	3,19
32 H 100	2F	ST	32	129,36	127,99	135	80	31,8	45	14	3,57
33 H 100	2F	ST	33	133,40	132,03	140	80	31,8	45	14	3,79
34 H 100	2F	ST	34	137,45	136,07	143	80	31,8	45	14	3,99
35 H 100	2F	ST	35	141,49	140,12	148	80	31,8	45	14	4,20
36 H 100	2F	ST	36	145,53	144,16	152	80	31,8	45	14	4,44
38 H 100	2F	ST	38	153,62	152,24	158	80	31,8	45	14	4,90
40 H 100	2F	ST	40	161,70	160,33	168	80	31,8	45	14	5,39
44 H 100	4F	GG	44	177,87	176,50	184	80	31,8	50	18	3,37
45 H 100	4F	GG	45	181,91	180,54	192	80	31,8	50	18	3,57
48 H 100	4F	GG	48	194,04	192,67	200	90	31,8	50	18	4,10
50 H 100	4	GG	50	202,13	200,75		90	31,8	50	18	4,24
52 H 100	4	GG	52	210,21	208,84		90	31,8	50	18	4,32
58 H 100	4	GG	58	234,47	233,09		90	31,8	50	18	4,61
60 H 100	4	GG	60	242,55	241,18		100	31,8	50	18	5,30
70 H 100	4	GG	70	282,98	281,61		100	31,8	55	18	6,13
72 H 100	4	GG	72	291,06	289,69		120	31,8	55	18	7,47
84 H 100	4	GG	84	339,57	338,20		120	31,8	55	18	8,52
96 H 100	4	GG	96	388,08	386,71		120	31,8	60	18	10,25
120 H 100	4	GG	120	485,10	483,73		120	31,8	60	18	13,09

Zahnriemenscheiben H 150


Teilung 1/2" (12,7 mm) - Riemenbreite 1 1/2" (38,1 mm)

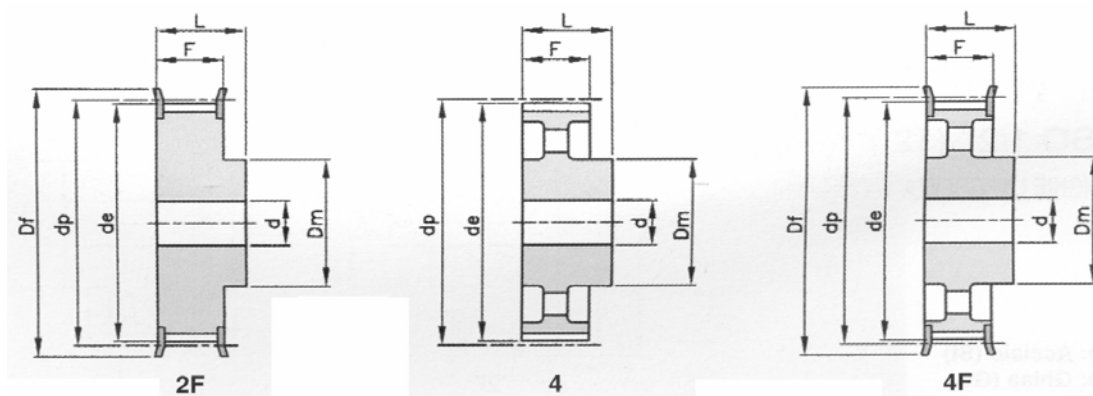

Code	Type	Material	Zähnezahl	dp	de	Df	Dm	F	L	d	kg
14 H 150	2F	ST	14	56,59	55,22	63	40	46,0	58	18	0,81
15 H 150	2F	ST	15	60,64	59,27	66	45	46,0	58	18	0,97
16 H 150	2F	ST	16	64,68	63,31	71	45	46,0	58	18	1,11
17 H 150	2F	ST	17	68,72	67,35	75	45	46,0	58	18	1,25
18 H 150	2F	ST	18	72,77	71,39	79	55	46,0	58	18	1,48
19 H 150	2F	ST	19	76,81	75,44	83	60	46,0	58	18	1,68
20 H 150	2F	ST	20	80,85	79,48	87	52	46,0	58	18	1,88
21 H 150	2F	ST	21	84,89	83,52	91	65	46,0	58	18	2,08
22 H 150	2F	ST	22	88,94	87,56	93	68	46,0	58	18	2,3
23 H 150	2F	ST	23	92,98	91,61	97	72	46,0	58	18	2,54
24 H 150	2F	ST	24	97,03	95,65	103	72	46,0	58	18	2,75
25 H 150	2F	ST	25	101,06	99,69	106	72	46,0	58	18	2,97
26 H 150	2F	ST	26	105,11	103,73	111	80	46,0	58	18	3,29
27 H 150	2F	ST	27	109,15	107,78	115	80	46,0	58	18	3,52
28 H 150	2F	ST	28	113,19	111,82	119	80	46,0	58	18	3,78
29 H 150	2F	ST	29	117,23	115,86	123	80	46,0	58	18	4,03
30 H 150	2F	ST	30	121,29	119,90	127	80	46,0	58	18	4,29
32 H 150	2F	ST	32	129,36	127,99	135	80	46,0	58	18	4,86
33 H 150	2F	ST	33	133,40	132,03	140	80	46,0	58	18	5,15
34 H 150	2F	ST	34	137,45	136,07	143	80	46,0	58	18	5,46
35 H 150	2F	ST	35	141,49	140,12	148	80	46,0	58	18	5,78
36 H 150	2F	ST	36	145,53	144,16	152	80	46,0	58	18	6,09
38 H 150	2F	ST	38	153,62	152,24	158	80	46,0	58	18	6,74
40 H 150	2F	ST	40	161,70	160,33	168	80	46,0	58	18	7,46
44 H 150	4F	GG	44	177,87	176,50	184	80	46,0	58	18	4,29
45 H 150	4F	GG	45	181,91	180,54	192	80	46,0	58	18	4,44
48 H 150	4F	GG	48	194,04	192,67	200	90	46,0	65	18	5,41
50 H 150	4	GG	50	202,13	200,75		90	46,0	65	18	5,59
52 H 150	4	GG	52	210,21	208,84		90	46,0	65	18	5,79
58 H 150	4	GG	58	234,47	233,09		90	46,0	65	18	6,15
60 H 150	4	GG	60	242,55	241,18		100	46,0	65	18	7,08
70 H 150	4	GG	70	282,98	281,61		100	46,0	65	24	7,77
72 H 150	4	GG	72	291,06	289,69		120	46,0	65	24	9,70
84 H 150	4	GG	84	339,57	338,20		120	46,0	65	24	10,99
96 H 150	4	GG	96	388,08	386,71		120	46,0	65	24	12,24
120 H 150	4	GG	120	485,10	483,73		120	46,0	65	24	16,17

Zahnriemenscheiben H 200


Teilung 1/2" (12,7 mm) - Riemenbreite 2" (50,8 mm)

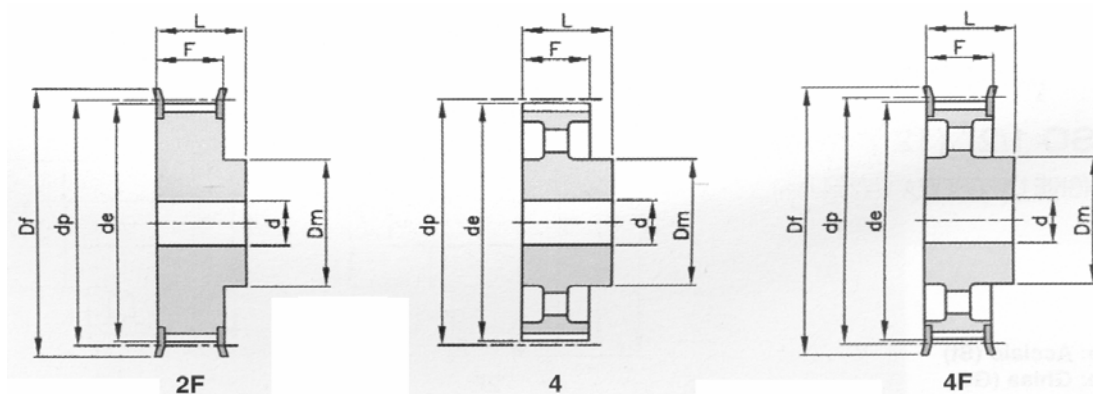

Code	Type	Material	Zähnezahl	dp	de	Df	Dm	F	L	d	kg
14 H 200	2F	ST	14	56,59	55,22	63	40	58,7	70	18	1,10
15 H 200	2F	ST	15	60,64	59,27	66	45	58,7	70	18	1,33
16 H 200	2F	ST	16	64,68	63,31	71	45	58,7	70	18	1,54
17 H 200	2F	ST	17	68,72	67,35	75	45	58,7	70	18	1,69
18 H 200	2F	ST	18	72,77	71,39	79	55	58,7	70	18	1,95
19 H 200	2F	ST	19	76,81	75,44	83	60	58,7	70	18	2,20
20 H 200	2F	ST	20	80,85	79,48	87	62	58,7	70	18	2,44
21 H 200	2F	ST	21	84,89	83,52	91	65	58,7	70	18	2,70
22 H 200	2F	ST	22	88,94	87,56	93	68	58,7	70	18	2,97
23 H 200	2F	ST	23	92,98	91,61	97	72	58,7	70	18	3,25
24 H 200	2F	ST	24	97,03	95,65	103	72	58,7	70	18	3,56
25 H 200	2F	ST	25	101,06	99,69	106	72	58,7	70	18	3,81
26 H 200	2F	ST	26	105,11	103,73	111	80	58,7	70	18	4,18
27 H 200	2F	ST	27	109,15	107,78	115	80	58,7	70	18	4,49
28 H 200	2F	ST	28	113,19	111,82	119	80	58,7	70	18	4,81
29 H 200	2F	ST	29	117,23	115,86	123	80	58,7	70	18	5,14
30 H 200	2F	ST	30	121,29	119,90	127	80	58,7	75	18	5,47
32 H 200	2F	ST	32	129,36	127,99	135	80	58,7	75	18	6,17
33 H 200	2F	ST	33	133,40	132,03	140	80	58,7	75	18	6,56
34 H 200	2F	ST	34	137,45	136,07	143	80	58,7	70	18	6,94
35 H 200	2F	ST	35	141,49	140,12	148	80	58,7	70	18	7,34
36 H 200	2F	ST	36	145,53	144,16	152	80	58,7	70	18	7,75
38 H 200	2F	ST	38	153,62	152,24	158	80	58,7	70	18	8,62
40 H 200	2F	ST	40	161,70	160,33	168	80	58,7	70	18	9,50
44 H 200	4F	GG	44	177,87	176,50	184	80	58,7	70	18	5,14
45 H 200	4F	GG	45	181,91	180,54	192	80	58,7	70	18	5,38
48 H 200	4F	GG	48	194,04	192,67	200	90	58,7	70	24	6,29
50 H 200	4	GG	50	202,13	200,75		90	58,7	70	24	6,68
52 H 200	4	GG	52	210,21	208,84		90	58,7	70	24	6,81
58 H 200	4	GG	58	234,47	233,09		90	58,7	75	24	7,26
60 H 200	4	GG	60	242,55	241,18		100	58,7	75	24	8,25
70 H 200	4	GG	70	282,98	281,61		100	58,7	75	28	9,20
72 H 200	4	GG	72	291,06	289,69		120	58,7	75	28	11,09
84 H 200	4	GG	84	339,57	338,20		120	58,7	75	28	12,63
96 H 200	4	GG	96	388,08	386,71		120	58,7	75	28	14,51
120 H 200	4	GG	120	485,10	483,73		120	58,7	75	28	19,15

Zahnriemenscheiben H 300


Teilung 1/2" (12,7 mm) - Riemenbreite 3" (76,2 mm)

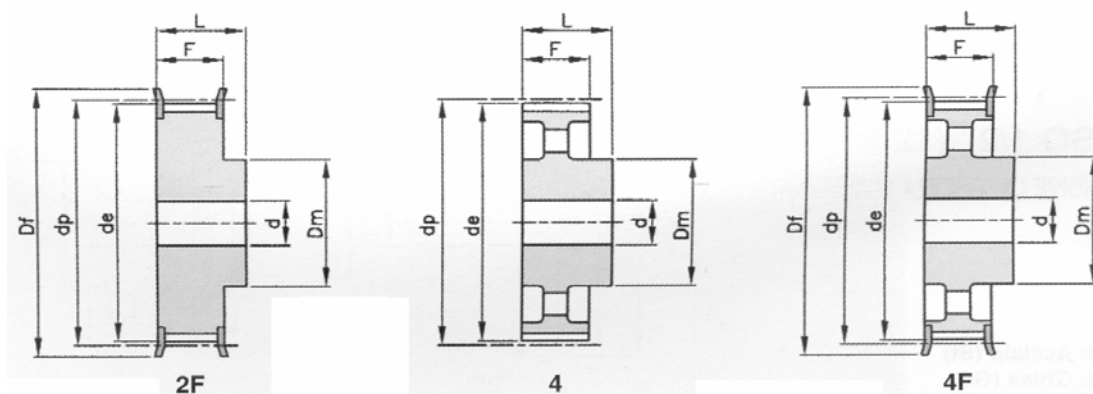

Code	Type	Material	Zähnezahl	dp	de	Df	Dm	F	L	d	kg
14 H 300	2F	ST	14	56,59	55,22	63	40	85,7	100	18	1,64
15 H 300	2F	ST	15	60,64	59,27	66	45	85,7	100	18	1,91
16 H 300	2F	ST	16	64,68	63,31	71	45	85,7	100	18	2,16
17 H 300	2F	ST	17	68,72	67,35	75	45	85,7	100	18	2,43
18 H 300	2F	ST	18	72,77	71,39	79	55	85,7	100	18	2,8
19 H 300	2F	ST	19	76,81	75,44	83	60	85,7	100	18	3,16
20 H 300	2F	ST	20	80,85	79,48	87	62	85,7	100	18	3,5
21 H 300	2F	ST	21	84,89	83,52	91	65	85,7	100	18	3,87
22 H 300	2F	ST	22	88,94	87,56	93	68	85,7	100	18	4,26
23 H 300	2F	ST	23	92,98	91,61	97	72	85,7	100	18	4,68
24 H 300	2F	ST	24	97,03	95,65	103	72	85,7	100	18	5,08
25 H 300	2F	ST	25	101,06	99,69	106	72	85,7	100	18	5,45
26 H 300	2F	ST	26	105,11	103,73	111	80	85,7	100	18	6,01
27 H 300	2F	ST	27	109,15	107,78	115	80	85,7	100	18	6,45
28 H 300	2F	ST	28	113,19	111,82	119	80	85,7	100	18	6,91
30 H 300	2F	ST	30	121,29	119,90	127	80	85,7	100	18	7,90
32 H 300	2F	ST	32	129,36	127,99	135	80	85,7	100	18	8,92
33 H 300	2F	ST	33	133,4	132,03	140	80	85,7	100	18	9,46
34 H 300	2F	ST	34	137,45	136,07	143	80	85,7	100	18	10,04
35 H 300	2F	ST	35	141,49	140,12	148	80	85,7	100	18	10,62
36 H 300	2F	ST	36	145,53	144,16	152	80	85,7	100	18	11,24
38 H 300	2F	ST	38	153,62	152,24	158	80	85,7	100	18	12,44
40 H 300	2F	ST	40	161,7	160,33	168	80	85,7	100	18	13,80
44 H 300	2F	GG	44	177,87	176,50	184	80	85,7	100	24	7,22
48 H 300	2F	GG	48	194,04	192,67	200	90	85,7	100	24	8,60
50 H 300	2F	GG	50	202,13	200,75		90	85,7	100	24	8,99
58 H 300	2F	GG	58	234,47	233,09		90	85,7	100	24	10,04
60 H 300	2F	GG	60	242,55	241,18		100	85,7	100	24	11,18
72 H 300	2F	GG	72	291,06	289,69		120	85,7	100	28	15,07
84 H 300	2F	GG	84	339,57	338,20		120	85,7	100	28	16,97
96 H 300	2F	GG	96	388,08	386,71		120	85,7	100	28	19,86
120 H 300	2F	GG	120	485,1	483,76		120	85,7	100	28	25,91

Zahnriemenscheiben XH 200


Teilung 7/8" (22,22 mm) - Riemenbreite 2" (50,8 mm)



Code	Type	Material	Zähnezahl	dp	de	Df	Dm	F	L	d	kg
18 HX 200	2F	ST	18	127,34	124,55	138	100	65	80	24	6,00
19 HX 200	2F	ST	19	134,41	131,62	146	100	65	80	24	6,60
20 HX 200	2F	ST	20	141,49	138,69	154	100	65	80	24	7,30
21 HX 200	2F	ST	21	148,56	145,77	160	110	65	80	24	8,73
22 HX 200	2F	ST	22	155,64	152,84	168	110	65	80	24	9,55
24 HX 200	2F	ST	24	169,79	166,99	183	120	65	80	24	11,47
25 HX 200	2F	ST	25	176,86	174,07	188	120	65	80	24	12,46
26 HX 200	2F	ST	26	183,93	181,14	198	120	65	80	24	13,47
27 HX 200	2F	ST	27	191,01	188,22	200	120	65	80	24	14,42
28 HX 200	2F	ST	28	198,09	195,29	211	120	65	80	24	15,44
30 HX 200	2F	ST	30	212,23	209,44	226	120	65	80	24	17,69
32 HX 200	2F	ST	32	226,38	223,59	240	120	65	80	24	19,95
34 HX 200	2F	ST	34	240,53	237,74	256	120	65	80	24	22,75

Zahnriemenscheiben XH 300


Teilung 7/8" (22,22 mm) - Riemenbreite 3" (76,2 mm)



Code	Type	Material	Zähnezahl	dp	de	Df	Dm	F	L	d	kg
18 HX 200	2F	ST	18	127,34	124,55	138	100	92	110	28	8,90
19 HX 200	2F	ST	19	134,41	131,62	146	100	92	110	28	9,20
20 HX 200	2F	ST	20	141,49	138,69	154	100	92	110	28	10,61
21 HX 200	2F	ST	21	148,56	145,77	160	110	92	110	28	11,87
22 HX 200	2F	ST	22	155,64	152,84	168	120	92	110	28	13,08
24 HX 200	2F	ST	24	169,79	166,99	183	120	92	110	28	15,77
25 HX 200	2F	ST	25	176,86	174,07	188	120	92	110	28	17,13
26 HX 200	2F	ST	26	183,93	181,14	198	120	92	110	28	18,55
27 HX 200	2F	ST	27	191,01	188,22	200	120	92	110	28	19,90
28 HX 200	2F	ST	28	198,09	195,29	211	150	92	110	28	22,27
30 HX 200	2F	ST	30	212,23	209,44	226	150	92	110	28	25,39
32 HX 200	2F	ST	32	226,38	223,59	240	150	92	110	28	28,73
34 HX 200	2F	ST	34	240,53	237,74	256	150	92	110	28	34,20

Zahnriemenscheiben XH 400

Teilung 7/8" (22,22 mm) - Riemenbreite 4" (101,6 mm)




Code	Type	Material	Zähnezahl	dp	de	Df	Dm	F	L	d	kg
18 HX 400	2F	ST	18	127,34	124,55	138	100	119	132	32	9,60
19 HX 400	2F	ST	19	134,41	131,62	146	100	119	132	32	10,80
20 HX 400	2F	ST	20	141,49	138,69	154	100	119	132	32	12,87
21 HX 400	2F	ST	21	148,56	145,77	160	110	119	132	32	14,42
22 HX 400	2F	ST	22	155,64	152,84	168	110	119	132	32	15,44
24 HX 400	2F	ST	24	169,79	166,99	183	120	119	132	32	19,22
25 HX 400	2F	ST	25	176,86	174,07	188	120	119	132	32	21,05
26 HX 400	2F	ST	26	183,93	181,14	198	120	119	132	32	22,80
27 HX 400	2F	ST	27	191,01	188,22	200	120	119	132	32	24,66
28 HX 400	2F	ST	28	198,09	195,29	211	150	119	132	32	27,23
30 HX 400	2F	ST	30	212,23	209,44	226	150	119	132	32	31,30
32 HX 400	2F	ST	32	226,38	223,59	240	150	119	132	32	35,20
34 HX 400	2F	ST	34	240,53	237,74	256	150	119	132	32	40,00



Antriebstechnik
Ketten für Antrieb und Förderung

Taper - Zahnriemenscheiben L 050

Teilung 3/8" (9,525 mm) - Riemenbreite 1/2" (12,7 mm)

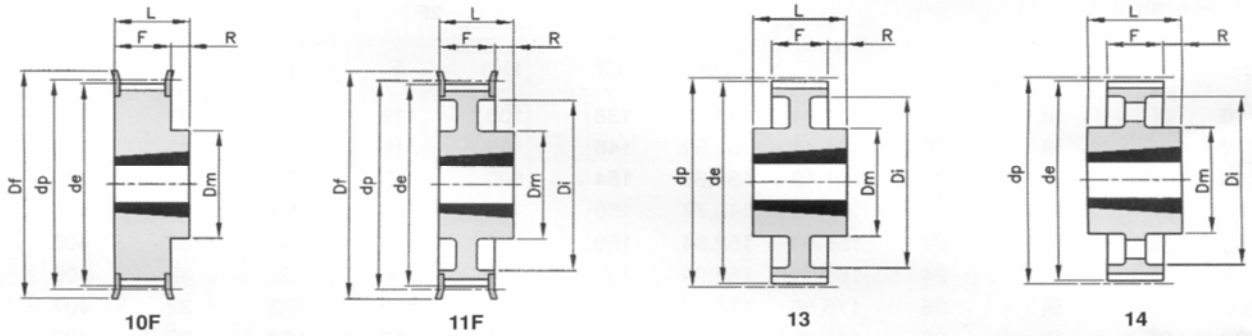


Code	Type	Material	Zähnezahl	Buchse	dp	de	Df	Dm	Di	F	L	R	kg
TL 18 L 050	10 F	St.	18	1108	54,57	53,81	60	44		19,0	22,0	3	0,20
TL 19 L 050	10 F	St.	19	1108	57,61	56,84	63	44		19,0	22,0	3	0,23
TL 20 L 050	10 F	St.	20	1108	60,64	59,88	66	48		19,0	22,0	3	0,27
TL 21 L 050	10 F	St.	21	1108	63,67	62,91	71	48		19,0	22,0	3	0,30
TL 22 L 050	10 F	St.	22	1108	66,70	65,94	75	51		19,0	22,0	3	0,34
TL 23 L 050	10 F	St.	23	1108	69,73	68,97	79	54		19,0	22,0	3	0,40
TL 24 L 050	10 F	St.	24	1108	72,77	72,00	79	54		19,0	22,0	3	0,45
TL 25 L 050	10 F	St.	25	1108	75,80	75,04	83	56		19,0	22,0	3	0,50
TL 26 L 050	10 F	St.	26	1108	78,83	78,07	87	60		19,0	22,0	3	0,55
TL 27 L 050	10 F	St.	27	1108	81,86	81,10	87	62		19,0	22,0	3	0,60
TL 28 L 050	10 F	St.	28	1108	84,89	84,13	91	65		19,0	22,0	3	0,65
TL 30 L 050	10 F	St.	30	1108	90,96	90,20	97	70		19,0	22,0	3	0,80
TL 32 L 050	10 F	St.	32	1108	97,02	96,26	103	74		19,0	22,0	3	0,98
TL 36 L 050	10 F	St.	36	1108	109,15	108,39	115	85		19,0	22,0	3	1,20
TL 40 L 050	10 F	St.	40	1610	121,28	120,51	127	97		19,0	25,0	6	1,40
TL 48 L 050	11 F	St.	48	1610	145,53	144,77	152	88	120	19,0	25,0	6	2,30
TL 60 L 050	13	St.	60	1610	181,91	181,15		92	166	19,0	25,0	3	2,20
TL 72 L 050	14	GG	72	1610	218,30	217,53		92	202	19,0	25,0	3	2,10
TL 84 L 050	14	GG	84	1610	254,68	253,90		92	236	19,0	25,0	3	2,46
TL 96 L 050	14	GG	96	2012	291,06	290,30		106	270	19,0	32,0	6,5	3,36
TL 120 L 050	14	GG	120	2012	363,83	363,07		106	343	19,0	32,0	6,5	4,44



Antriebstechnik
Ketten für Antrieb und Förderung

Taper - Zahnriemenscheiben L 075

Teilung 3/8" (9,525 mm) - Riemenbreite 3/4" (19,05 mm)

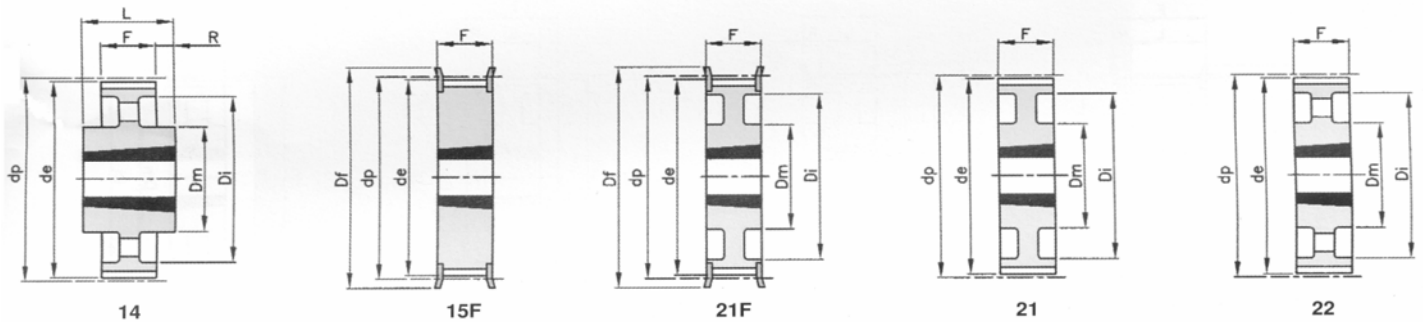


Code	Type	Material	Zähnezahl	Buchse	dp	de	Df	Dm	Di	F	L	R	kg
TL 18 L 075	15F	St.	18	1108	54,57	53,81	60	44		25,0	25,0		0,25
TL 19 L 075	15F	St.	19	1108	57,61	56,84	63	44		25,0	25,0		0,32
TL 20 L 075	15F	St.	20	1108	60,64	59,88	66	48		25,0	25,0		0,35
TL 21 L 075	15F	St.	21	1108	63,67	62,91	71	48		25,0	25,0		0,40
TL 22 L 075	15F	St.	22	1108	66,70	65,94	75	51		25,0	25,0		0,44
TL 23 L 075	15F	St.	23	1108	69,73	68,97	79	54		25,0	25,0		0,48
TL 24 L 075	15F	St.	24	1108	72,77	72,00	79	54		25,0	25,0		0,55
TL 25 L 075	15F	St.	25	1108	75,80	75,04	83	56		25,0	25,0		0,63
TL 25 L 075	15F	St.	26	1108	78,83	78,07	87	60		25,0	25,0		0,66
TL 26 L 075	15F	St.	27	1108	81,86	81,10	87	62		25,0	25,0		0,70
TL 27 L 075	15F	St.	28	1108	84,89	84,13	91	65		25,0	25,0		0,72
TL 30 L 075	15F	St.	30	1108	90,96	90,20	97	70		25,0	25,0		0,93
TL 32 L 075	15F	St.	32	1108	97,02	96,26	103	74		25,0	25,0		1,10
TL 36 L 075	15F	St.	36	1610	109,15	108,39	115	85		25,0	25,0		1,20
TL 40 L 075	15F	St.	40	1610	121,28	120,51	127	97		25,0	25,0		1,70
TL 48 L 075	21F	St.	48	1610	145,53	144,77	152	88	120	25,0	25,0		2,60
TL 60 L 075	21	St.	60	1610	181,91	181,15		92	166	25,0	25,0		3,00
TL 72 L 075	22	GG	72	1610	218,30	217,53		92	202	25,0	25,0		2,33
TL 84 L 075	14	GG	84	2012	254,68	253,90		92	236	25,0	32,0	3,5	3,55
TL 96 L 075	14	GG	96	2012	291,06	290,30		106	270	25,0	32,0	3,5	3,95
TL 120 L 075	14	GG	120	2012	363,83	363,07		106	343	25,0	32,0	3,5	5,61



Antriebstechnik
Ketten für Antrieb und Förderung

Taper - Zahnriemenscheiben L 100

Teilung 3/8" (9,525 mm) - Riemenbreite 1" (25,4 mm)

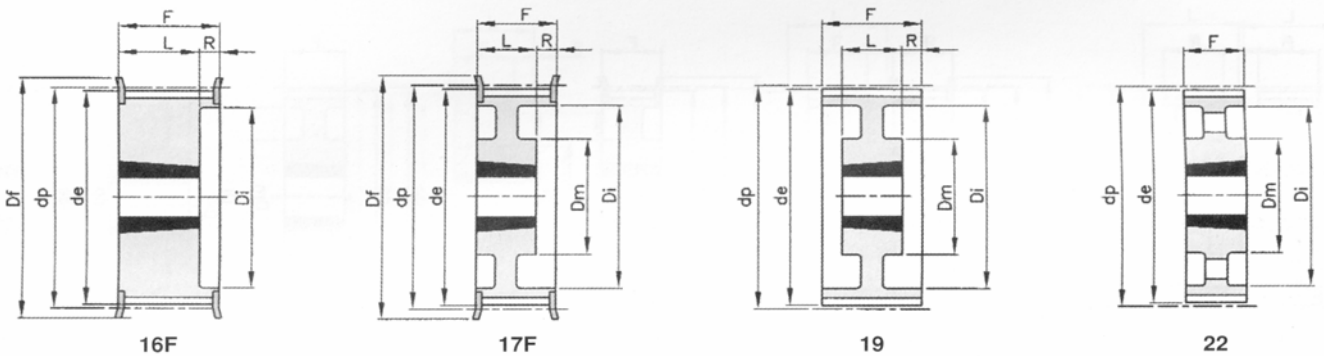


Code	Type	Material	Zähnezahl	Buchse	dp	de	Df	Dm	Di	F	L	R	kg
TL 18 L 100	16F	St.	18	1108	54,57	53,81	60		38	31,0	22,0	9,0	0,20
TL 19 L 100	16F	St.	19	1108	57,61	56,84	63		38	31,0	22,0	9,0	0,32
TL 20 L 100	16F	St.	20	1108	60,64	59,88	66		45	31,0	22,0	9,0	0,41
TL 21 L 100	16F	St.	21	1108	63,67	62,91	71		45	31,0	22,0	9,0	0,45
TL 22 L 100	16F	St.	22	1108	66,70	65,94	75		48	31,0	22,0	9,0	0,47
TL 23 L 100	16F	St.	23	1108	69,73	68,97	79		52	32,0	22,0	10,0	0,50
TL 24 L 100	16F	St.	24	1108	72,77	72,00	79		52	32,0	22,0	10,0	0,64
TL 25 L 100	16F	St.	25	1108	75,80	75,04	83		54	32,0	22,0	10,0	0,68
TL 26 L 100	16F	St.	26	1108	78,83	78,07	87		60	32,0	22,0	10,0	0,70
TL 27 L 100	16F	St.	27	1108	81,86	81,10	87		60	32,0	22,0	10,0	0,83
TL 28 L 100	16F	St.	28	1108	84,89	84,13	91		65	32,0	22,0	10,0	0,85
TL 30 L 100	16F	St.	30	1210	90,96	90,20	97		71	32,0	25,0	7,0	0,90
TL 32 L 100	16F	St.	32	1210	97,02	96,26	103		75	32,0	25,0	7,0	1,05
TL 36 L 100	16F	St.	36	1610	109,15	108,39	115		86	32,0	25,0	7,0	1,40
TL 40 L 100	16F	St.	40	1610	121,28	120,51	127		96	32,0	25,0	7,0	1,65
TL 48 L 100	17F	St.	48	1610	145,53	144,77	152		120	32,0	25,0	7,0	2,80
TL 60 L 100	19	St.	60	1610	181,91	181,15		92	166	32,0	25,0	3,5	2,70
TL 72 L 100	22	GG	72	2012	218,30	217,53		92	202	32,0	32,0		2,96
TL 84 L 100	22	GG	84	2012	254,68	253,90		106	236	32,0	32,0		3,87
TL 96 L 100	22	GG	96	2012	291,06	290,30		106	270	32,0	32,0		4,64
TL 120 L 100	22	GG	120	2012	363,83	363,07		106	343	32,0	32,0		6,37



Antriebstechnik
Ketten für Antrieb und Förderung

Taper - Zahnriemenscheiben H 100

Teilung 1/2" (12,7 mm) - Riemenbreite 1" (25,4 mm)



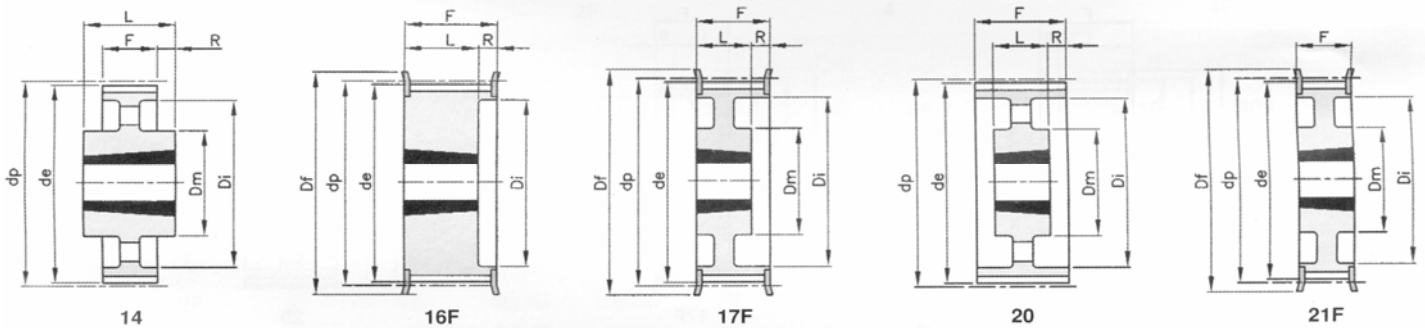


Code	Type	Material	Zähnezahl	Buchse	dp	de	Df	Dm	Di	F	L	R	kg
TL 16 H 100	16F	ST	16	1108	64,68	63,31	71		45,0	31,0	22,0	9,0	0,42
TL 18 H 100	16F	ST	18	1210	72,77	73,39	79		52,0	31,0	25,0	6,0	0,49
TL 19 H 100	16F	ST	19	1210	76,81	75,44	83		56,0	31,0	25,0	6,0	0,62
TL 20 H 100	16F	ST	20	1210	80,85	79,48	87		60,0	31,0	25,0	6,0	0,73
TL 21 H 100	16F	ST	21	1210	84,89	83,52	91		64,0	32,0	25,0	7,0	0,80
TL 22 H 100	16F	ST	22	1210	88,94	87,56	93		67,0	32,0	25,0	7,0	0,94
TL 23 H 100	16F	ST	23	1610	92,98	91,61	97		70,0	32,0	25,0	7,0	0,97
TL 24 H 100	16F	ST	24	1610	97,02	95,65	103		73,5	32,0	25,0	7,0	1,05
TL 25 H 100	16F	ST	25	1610	101,06	99,69	106		77,0	32,0	25,0	7,0	1,10
TL 26 H 100	16F	ST	26	1610	105,11	103,73	111		82,0	32,0	25,0	7,0	1,20
TL 27 H 100	16F	ST	27	1610	109,15	107,78	115		85,0	32,0	25,0	7,0	1,35
TL 28 H 100	16F	ST	28	1610	113,19	111,82	119		90,5	32,0	25,0	7,0	1,50
TL 30 H 100	16F	ST	30	1610	121,28	119,90	127		98,0	32,0	25,0	7,0	1,78
TL 32 H 100	17F	ST	32	1610	129,36	127,99	135	90	106	32,0	25,0	7,0	2,05
TL 36 H 100	17F	ST	36	1610	145,53	144,16	152	92	121	32,0	25,0	7,0	2,80
TL 40 H 100	17F	ST	40	1610	161,70	160,33	168	92	138	32,0	25,0	7,0	3,65
TL 44 H 100	21F	ST	44	2012	177,87	176,50	184	106	152	32,0	32,0		3,86
TL 48 H 100	21F	ST	48	2012	194,04	192,67	200	106	169	32,0	32,0		4,20
TL 60 H 100	20	GG	60	2012	242,55	241,18		106	223	34,0	32,0	1,0	3,76
TL 72 H 100	20	GG	72	2012	291,06	289,69		106	270	34,0	32,0	1,0	4,88
TL 84 H 100	20	GG	84	2012	339,57	338,20		106	318	34,0	32,0	1,0	6,12
TL 96 H 100	14	GG	96	2517	388,08	386,71		119	366	34,0	45,0	5,5	7,95
TL 120 H 100	14	GG	120	2517	485,10	483,73		119	462	34,0	45,0	5,5	10,05


Taper - Zahnriemenscheiben H 150

Teilung 1/2" (12,7 mm) - Riemenbreite 1 1/2" (38,1 mm)

Antriebstechnik
Ketten für Antrieb und Förderung

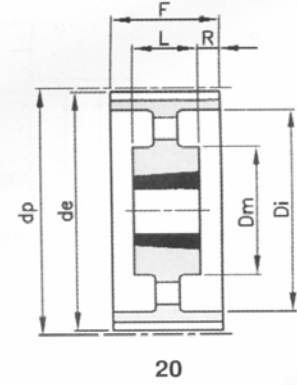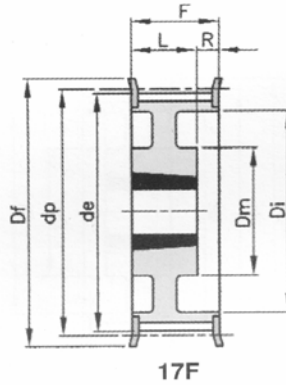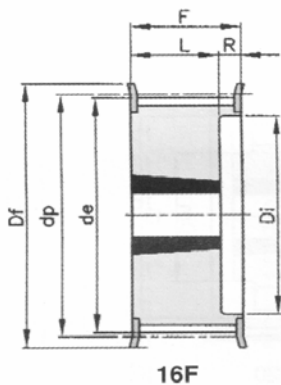




Code	Type	Material	Zähnezahl	Buchse	dp	de	Df	Dm	Di	F	L	R	kg
TL 18 H 150	16F	ST	18	1210	72,77	71,39	79		52,0	45,0	25,0	20,0	0,60
TL 19 H 150	16F	ST	19	1210	76,81	75,44	83		56,0	45,0	25,0	20,0	0,72
TL 20 H 150	16F	ST	20	1210	80,85	79,48	87		60,0	45,0	25,0	20,0	0,83
TL 21 H 150	16F	ST	21	1210	84,89	83,52	91		64,0	45,0	25,0	20,0	1,00
TL 22 H 150	16F	ST	22	1210	88,94	87,56	93		67,0	45,0	25,0	20,0	1,25
TL 23 H 150	16F	ST	23	1610	92,98	91,61	97		70,0	45,0	25,0	20,0	1,05
TL 24 H 150	16F	ST	24	1610	97,02	95,65	103		73,5	45,0	25,0	20,0	1,10
TL 25 H 150	16F	ST	25	1610	101,06	99,69	106		77,0	45,0	25,0	20,0	1,30
TL 26 H 150	16F	ST	26	1610	105,11	103,73	111		82,0	45,0	25,0	20,0	1,42
TL 27 H 150	16F	ST	27	1610	109,15	107,78	115		85,0	45,0	25,0	20,0	1,65
TL 28 H 150	16F	ST	28	1610	113,19	111,82	119		90,5	45,0	25,0	20,0	1,88
TL 30 H 150	16F	ST	30	1610	121,28	119,90	127		98,0	45,0	25,0	20,0	2,05
TL 32 H 150	17F	St	32	1610	129,36	127,99	135	90	106	45,0	25,0	20,0	2,35
TL 36 H 150	17F	ST	36	1610	145,53	144,16	152	92	121	45,0	25,0	20,0	3,20
TL 40 H 150	17F	ST	40	1610	161,70	160,33	168	92	138	45,0	25,0	20,0	4,10
TL 44 H 150	17F	ST	44	2012	177,87	176,50	184	106	152	45,0	32,0	13,0	4,50
TL 48 H 150	17F	ST	48	2012	194,04	192,67	200	106	169	45,0	32,0	13,0	4,80
TL 60 H 150	20	GG	60	2012	242,55	241,18		106	223	46,0	32,0	7,0	4,51
TL 72 H 150	20	GG	72	2012	291,06	289,69		106	270	46,0	32,0	7,0	6,16
TL 84 H 150	20	GG	84	2012	339,57	338,20		106	320	46,0	32,0	7,0	7,40
TL 96 H 150	20	GG	96	2517	388,08	386,71		119	366	46,0	45,0	0,5	9,87
TL 120 H 150	20	GG	120	2517	485,10	483,73		119	462	46,0	45,0	0,5	13,50



Antriebstechnik
Ketten für Antrieb und Förderung

Taper - Zahnriemenscheiben H 200

Teilung 1/2" (12,7 mm) - Riemenbreite 2" (50,8 mm)

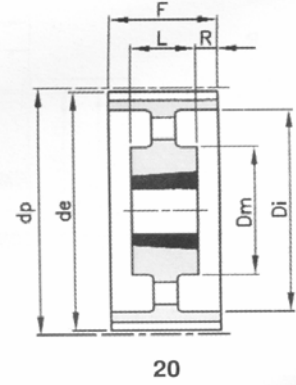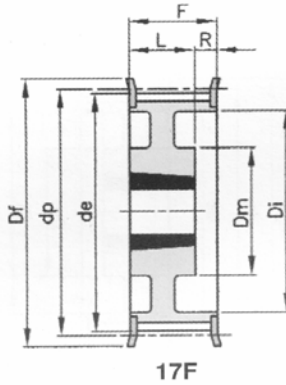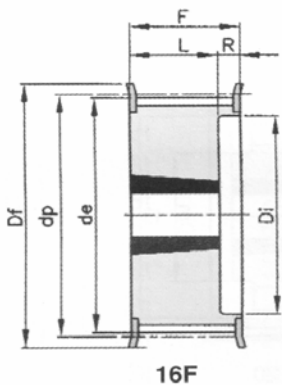




Code	Type	Material	Zähnezahl	Buchse	dp	de	Df	Dm	Di	F	L	R	kg
TL 18 H 200	16F	ST	18	1210	72,77	71,39	79		52,0	58,0	25,0	33,0	0,84
TL 19 H 200	16F	ST	19	1210	76,81	75,44	83		56,0	58,0	25,0	33,0	0,96
TL 20 H 200	16F	ST	20	1610	80,85	79,48	87		60,0	58,0	25,0	33,0	0,93
TL 21 H 200	16F	ST	21	1610	84,89	83,52	91		64,0	58,0	25,0	33,0	1,07
TL 22 H 200	16F	ST	22	1610	88,94	87,56	93		67,0	58,0	25,0	33,0	1,25
TL 23 H 200	16F	ST	23	1610	92,98	91,61	97		70,0	58,0	25,0	33,0	1,40
TL 24 H 200	16F	ST	24	1610	97,02	95,65	103		73,5	58,0	25,0	33,0	1,55
TL 25 H 200	16F	ST	25	1610	101,06	99,69	106		77,0	58,0	25,0	33,0	1,71
TL 26 H 200	16F	ST	26	1610	105,11	103,73	111		82,0	58,0	25,0	33,0	1,84
TL 27 H 200	16F	ST	27	1610	109,15	107,78	115		85,0	58,0	25,0	33,0	2,06
TL 28 H 200	16F	ST	28	1610	113,19	111,82	119		90,5	58,0	25,0	33,0	2,17
TL 30 H 200	16F	ST	30	1610	121,28	119,90	127		98,0	58,0	25,0	33,0	2,60
TL 32 H 200	16F	ST	32	2012	129,36	127,99	135		106	58,0	32,0	26,0	2,95
TL 36 H 200	17F	ST	36	2012	145,53	144,16	152	102	121	58,0	32,0	26,0	3,62
TL 40 H 200	17F	ST	40	2012	161,70	160,33	168	106	138	58,0	32,0	26,0	4,33
TL 44 H 200	17F	ST	44	2012	177,87	176,50	184	106	152	58,0	32,0	26,0	5,33
TL 48 H 200	17F	ST	48	2517	194,04	192,67	200	119	169	58,0	45,0	13,0	6,47
TL 60 H 200	20	GG	60	2517	242,55	241,18		119	223	60,0	45,0	7,5	5,86
TL 72 H 200	20	GG	72	2517	291,06	289,69		119	270	60,0	45,0	7,5	7,42
TL 84 H 200	20	GG	84	2517	339,57	338,20		119	320	60,0	45,0	7,5	8,73
TL 96 H 200	20	GG	96	2517	388,08	386,71		119	366	60,0	45,0	7,5	10,83
TL 120 H 200	20	GG	120	2517	485,10	483,73		119	462	60,0	45,0	7,5	14,95



Antriebstechnik
Ketten für Antrieb und Förderung

Taper - Zahnriemenscheiben H 300

Teilung 1/2" (12,7 mm) - Riemenbreite 3" (76,2 mm)

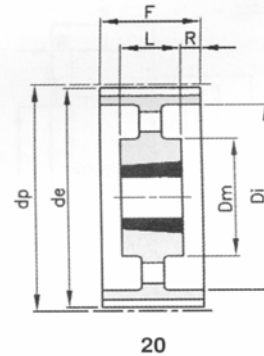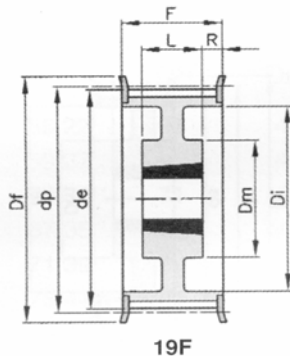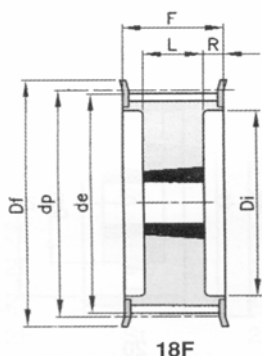

Code	Type	Material	Zähnezahl	Buchse	dp	de	Df	Dm	Di	F	L	R	kg
TL 20 H 300	18F	ST	20	1615	80,85	79,48	87		64,5	84,0	38,0	23,0	1,22
TL 21 H 300	18F	ST	21	1615	84,89	83,52	91		65,0	84,0	38,0	23,0	1,52
TL 22 H 200	18F	ST	22	1615	88,94	87,56	93		67,0	84,0	38,0	23,0	1,80
TL 23 H 300	18F	ST	23	1615	92,98	91,61	97		70,0	84,0	38,0	23,0	2,04
TL 24 H 300	18F	ST	24	1615	97,02	95,65	103		73,5	84,0	38,0	23,0	2,29
TL 25 H 300	18F	ST	25	1615	101,06	99,69	106		77,0	84,0	38,0	23,0	2,54
TL 26 H 300	18F	ST	26	1615	105,11	103,73	111		82,0	84,0	38,0	23,0	2,73
TL 27 H 300	18F	ST	27	2012	109,15	107,78	115		85,0	84,0	32,0	26,0	2,54
TL 28 H 300	18F	ST	28	2012	113,19	111,82	119		90,5	84,0	32,0	26,0	2,68
TL 30 H 300	18F	ST	30	2012	121,28	119,90	127		98,0	84,0	32,0	26,0	3,21
TL 32 H 300	18F	ST	32	2517	129,36	127,99	135		106	84,0	45,0	19,5	3,58
TL 36 H 300	18F	ST	36	2517	145,53	144,16	152		121	84,0	45,0	19,5	4,99
TL 40 H 300	18F	ST	40	2517	161,70	160,33	168		138	84,0	45,0	19,5	6,50
TL44 H 300	19F	ST	44	2517	177,87	176,50	184	119	152	86,0	45,0	20,5	7,55
TL 48 H 300	19F	ST	48	2517	194,04	192,67	200	119	169	86,0	45,0	20,5	8,66
TL 60 H 300	20	GG	60	2517	242,55	241,18		119	223	86,0	45,0	20,5	7,42
TL 72 H 300	20	GG	72	2517	291,06	289,69		119	270	86,0	45,0	20,5	9,33
TL 84 H 300	20	GG	84	2517	339,57	338,20		119	320	86,0	45,0	20,5	11,19
TL 96 H 300	20	GG	96	3030	388,08	386,71		150	362	86,0	76,0	5,0	17,96
TL 120 H 300	20	GG	120	3030	485,10	483,73		150	460	86,0	76,0	5,0	22,23